

400031

4000K Libra Diecast Round Eyelid Bulkhead



FEATURES

- Durable die-cast aluminium body
- UV-protected, corrosion-resistant coating
- 5 Year Warranty
- IP65 rated
- IK08 rated
- Optional emergency and plug and play sensor version



IP65



IK08

UK
CA



AVAILABLE OPTIONS



Emergency



Sensor &
Emergency



Sensor



Plug&Play

Libra is our 4000K IP65 Diecast Round Eyelid designed for both functional and decorative lighting. Built with a die-cast aluminium body and UV-protected powder-coated finish, it offers excellent corrosion resistance and long-term reliability. The eyelid front design provides controlled light distribution and reduced glare - ideal for pathways, entrances, and exterior walls. Optional emergency and plug and play microwave sensor versions are available.

Code	Description	Wattage	Colour	Lumens
400031	4000K Libra IP65 Diecast Round Eyelid Bulkhead	13W	4000K	1430lm

TECHNICAL SPECIFICATION

Input Voltage	220-240VAC, 50/60Hz
Total Wattage	13W
Luminaire Lumens	1430lm
Lumens P/Watt	110lm/W
LED Chips	BMTC 2835
LED Forward Voltage/Current	36VDC / 0.72A
LED Chip Lifetime (L70)	>50,000hrs

0113 426 8300

sales@performance-lighting.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ
www.performance-lighting.co.uk




400031

4000K Libra Diecast Round Eyelid Bulkhead

TECHNICAL SPECIFICATION

CCT/CRI/SDCM	4000K/CRI>80/SDCM<6
Driver	Lifud
Power Factor	>0.9
Running Current	0.11A
Inrush Current	≤18A/160us
Material/Finish	Die-casting aluminium/Black powder coating / RAL9005
Class	Class I
IP	IP65
IK	IK08
Beam Angle	120°
Glow Wire Testing (TP rating)	750°C/TP(b)
Installation Method	Surface Mounted
Temperature	-15°C to +45°C
Warranty	5 years warranty
Certificates	CE, CB, ROHS, UKCA

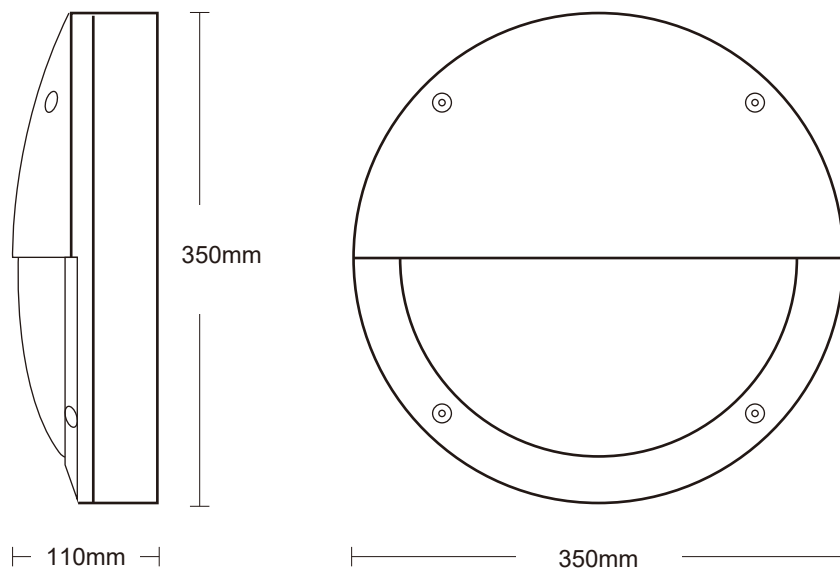

0113 426 8300

sales@performance-lighting.co.uk

Unit B8, Astra Business Park,
Parkside Lane, Leeds LS11 5SZ

www.performance-lighting.co.uk

