


A UGR19 LED panel with selectable wattage. This modern design utilises indirect lighting to eliminate harsh lighting, ideal for any office environment.

- 595 x 595mm LED panel ideal for retrofitting, replacing traditional fluorescent luminaires or upgrading existing panels
- High efficacy 125lm/W
- Compatible with Rhinolux Kolbe Emergency pack (RL-KO-4-EM / RL-KO-4-EM-D), sold separately
- 50,000 L70 rating
- 5 year warranty



Technical Specs & Notes	
Product Code	RL-KT-30-60-UGR
Description	UGR19 LED Panel
Input Voltage	220-240V 50/60Hz
Wattage selectable	16 / 21 / 25 / 30W
Lumens output	2000 / 2625 / 3125 / 3750lm
UGR	<19
Colour Temperature	4000K
Efficacy	125lm/W
LED Chips	SMD2835
LED Forward Voltage / Current	5.6–6.0V / 75mA
LED Chip Lifetime (L70)	50,000hrs
CRI	>80
SDCM	<6
Power Factor	0.9
Running Current	370/510/610/750mA
Inrush Current	19.2A / 209µs
Class / IP / IK rating	Class 2 / IP20 / IK02
Material / Finish	Aluminium frame / PMMA lens + PS diffuser — white, RAL9016
Beam Angle	90°
Certificates	UKCA / CE / RoHS
Dimensions	595 x 595 x 40mm
Warranty	5 year

Line drawing

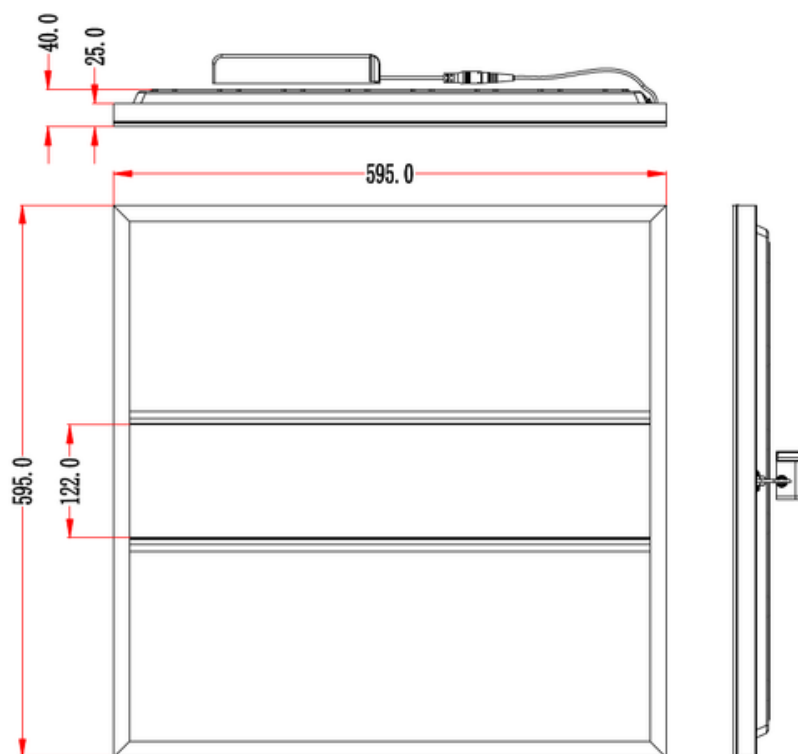

Image



RL-KT-30-60-UGR



RL-KO-4-EM-ST
RL-KO-4-EM-D